


LS filter


For TXV series pumps

Reference: 230035

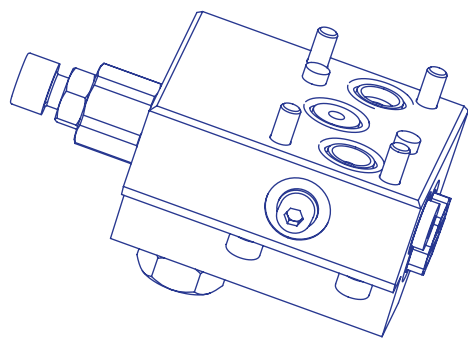

► Characteristics:

- Applicable for pumps fitted with an LS control device, from january 2014.
- Filter of 225µm to protect the LS control of the pump, against possible contamination from the circuit.
- Mounting direction: flat side on pump side / rounded side on control side

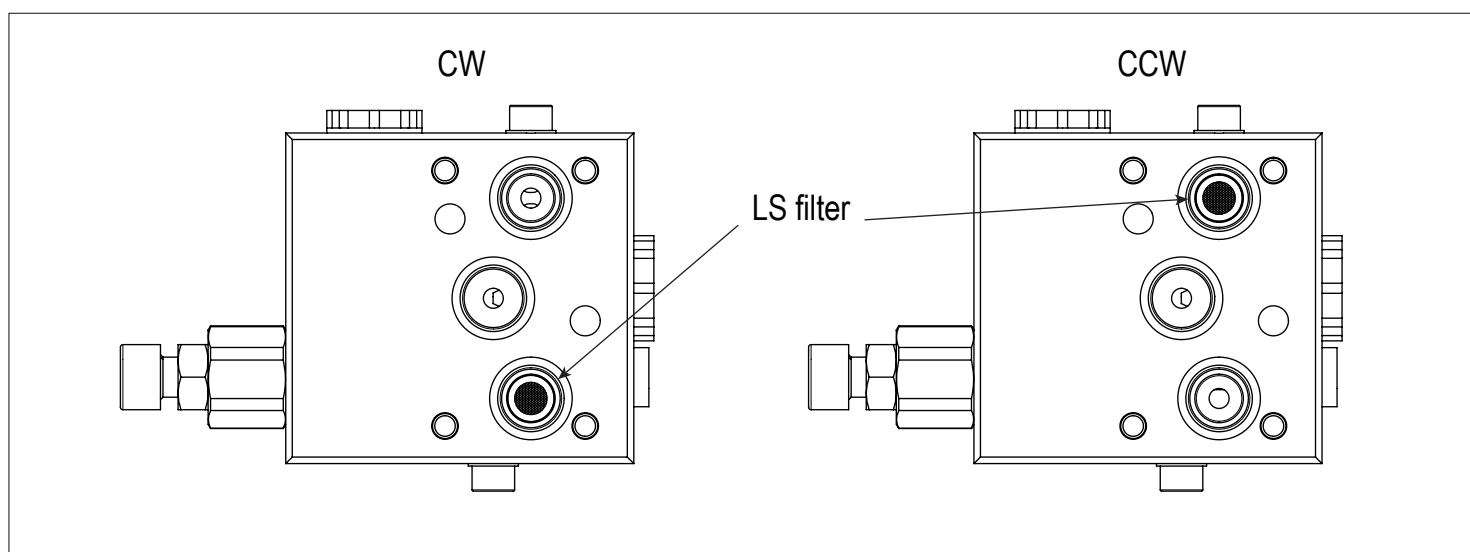


As all types of filtration, the LS filter requires regular maintenance to avoid clogging.

Observe: TXV130_0520300 indexable pump requires 2 filters.

► Mounting direction:

Important:

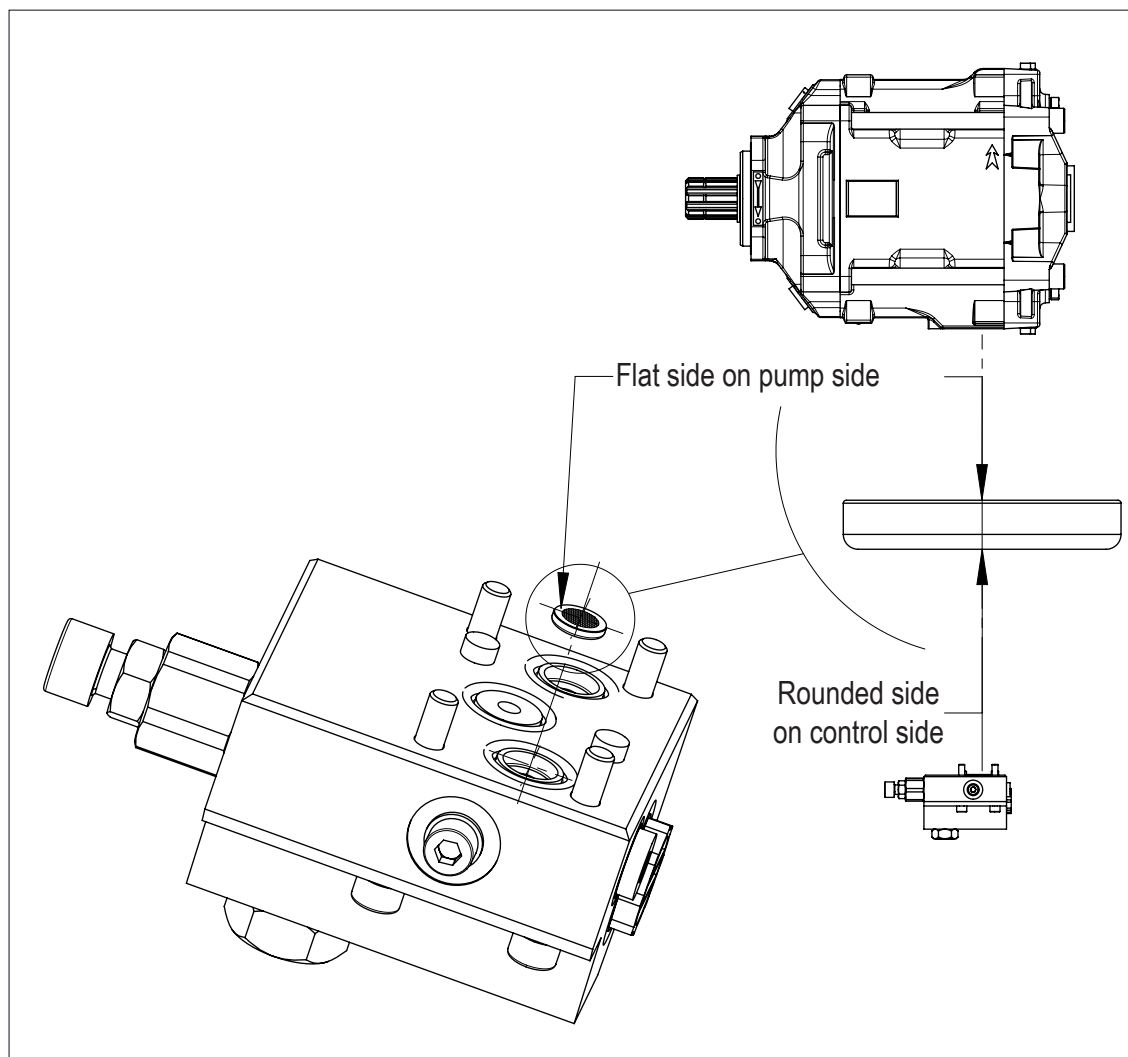

For further information, please feel free to contact our Technical Department.
Mr Hervé COLIN - Tel : +33(0)3 83 76 05 37 - hcolin@hydroleduc.com



www.hydroleduc.com



HYDRO LEDUC SAS
Head office & Factory
BP9 - 54122 Azerailles - FRANCE
Tel. +33 (0)3 83 76 77 40
Fax +33 (0)3 83 75 21 58

HYDRO LEDUC GmbH
Haselwander Str. 5
D-77746 Schutterwald - GERMANY
Tel. +49 (0) 781-9482590
Fax +49 (0) 781-9482592

HYDRO LEDUC N.A. Inc.
19416 Park Row - Suite 170
Houston, Texas 77084 - USA
Tel. +1 281 679 9654
Fax +1 832 321 3553

HYDRO LEDUC AB
Batterivägen 5
461 38 Trollhättan - SWEDEN
Tel. 46 (0) 520 10 820